Home Elevator ¾" X 4" Rule


McKinley Elevator Corporation installs a fully code complainant elevator per the ASME ANSI A17.1 National Safety Code for Elevators- Section 5.3 Private Residences Elevators and California Title 8. The provided hoistway must meet these requirements.

ASME 5.3.7.2 of the above referenced code clearance between the hoistway doors or gates and the landings sills and car doors or gates effective May 2016.

Clearance requirements within a private residence state:

- The clearance between the hoistway face of the hoistway doors and the hoistway edge of the landing sill shall not exceed 3/4" (0.75 in).
- The distance between the **hoistway face of the landing door** and the **car door or gate** shall not exceed **4**" (inches).

Note: Concrete block/masonry shafts and some commercial metal door frames can often create rule violations.

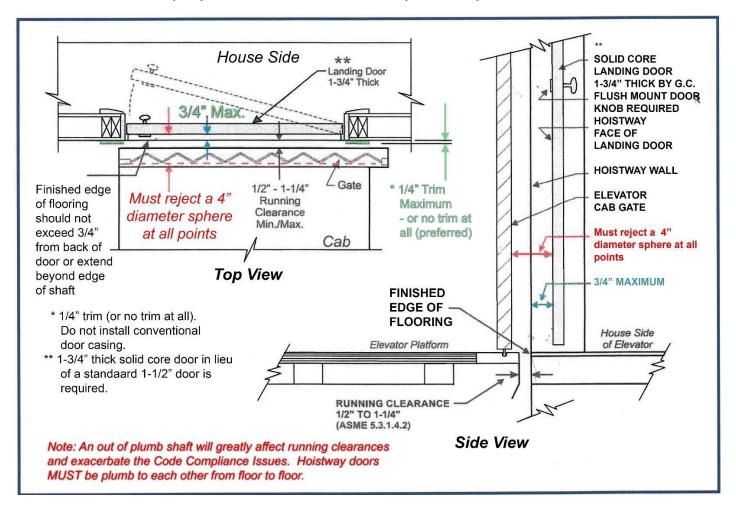

Acknowledged by:

Authorized Signature

Date

17611 Armstrong Avenue Prine, California 92614
949:261-9244
FAX 948/955-3875

Secremento • Las Vegas • Phoenix